
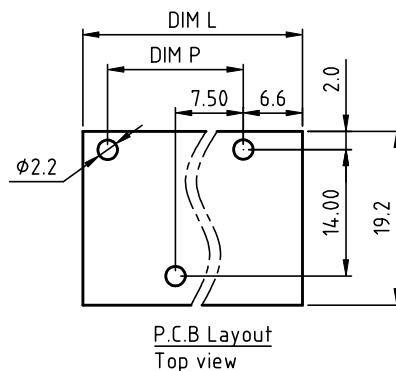

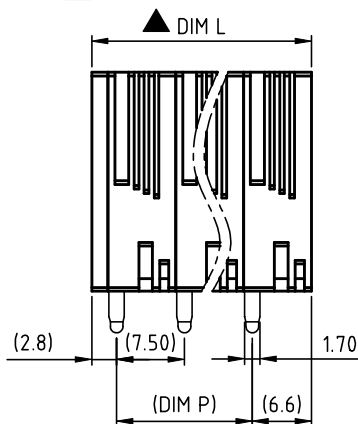



RoHS Compliance

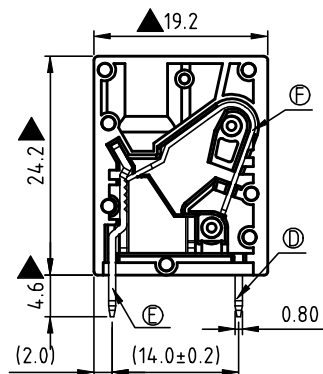

N=NUMBER OF POLES

DIM		TOL		
		1P--5P	7P--11P	13P--15P
Dim P	(N-1)×7.5	±0.15	±0.25	±0.35
Dim L	N×7.5+1.8	±0.15	±0.25	±0.35

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B		11/28/22	The first release	Johnson

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal side body: Thermoplastic (UL94V-0)
- Item ③ Terminal cover: Thermoplastic (UL94V-0)
- Item ④ Contact pin : Copper, Tin Plated.
- Item ⑤ Contact pin : Copper, Tin Plated.
- Item ⑥ Spring clamp : Stainless steel

Electrical:	cULus	TUV(EN/IEC60998-2-2)
● Voltage rating:	600 V	1000 V
● Current rating(Sol):	30 A	41 A
● Current rating(Str):	35 A	41 A
● Solid wire(AWG):	10-24	0.2mm ² -10mm ² (IEC)
● Stranded wire(AWG):	8-24	0.2mm ² -6mm ² (IEC)
● Wire strip length:	15-16 mm	
● Withstanding Voltage:	1.6KV	3.5KV
● Operating temperature:	-40°C to +115°C	
● Soldering temperature:	260°C±5°C/5 Sec	
● Safety Approval:		
● Critical dimension:		
● Reference dimension: (X)		

● The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

NK xx A 0 x C xxxx G		
No. OF POLES	Body Color	In copper Alloy
01: 1POLES	0 Black (RAL9005)	0000: "@" Logo (Standard)
03: 3 POLES	2 Red (RAL3001/D)	000A: "ANYTEK" Mark
:	3 Orange(RAL2011/P)	Any special item by
15: 15 POLES	4 Yellow(RAL1018/A)	customer request.
	5 Green(RAL6018/T)	please contact sales
	6 Blue (RAL5015/A)	department.
	8 Grey(RAL7004/P)	
	9 White(RAL1102)	
	C Multiple colors	






Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NK 7.5mm Series Vertical (Single tail C type)(第1P為右缺腳子彈邊蓋) 單數P			
PART NO.	NKxxA0xCxxxxG			DWG NO.	8NK0032
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Johnson 2022.11.29	Johnson 2022.11.29		Tolerance
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: B	X° ±1°

RoHS Compliance

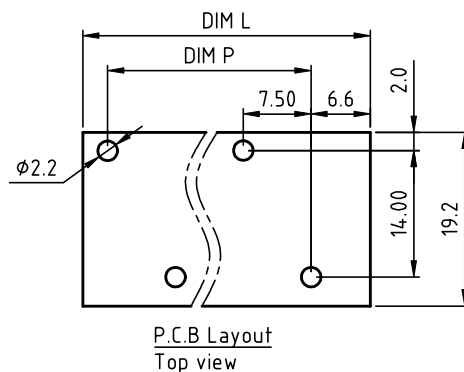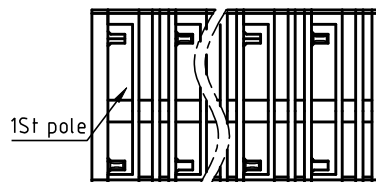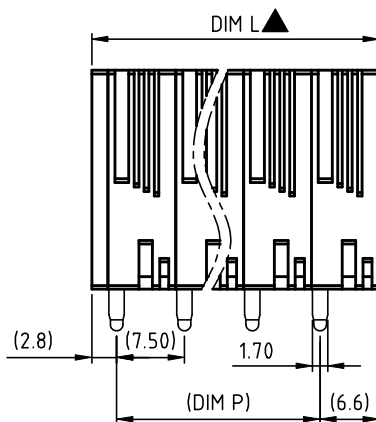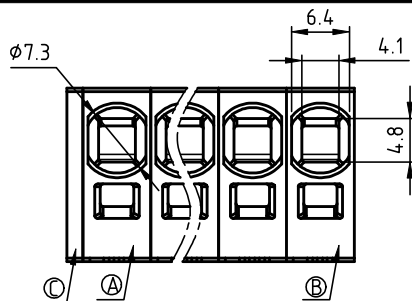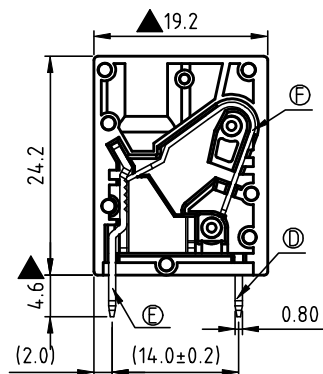

N=NUMBER OF POLES

DIM		TOL		
		2P--6P	8P--12P	14P--16P
Dim P	(N-1)×7.5	±0.15	±0.25	±0.35
Dim L	N×7.5+1.8	±0.15	±0.25	±0.35

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B		11/28/22	The first release	Johnson
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal side body: Thermoplastic (UL94V-0)
- Item ③ Terminal cover: Thermoplastic (UL94V-0)
- Item ④ Contact pin : Copper, Tin Plated.
- Item ⑤ Contact pin : Copper, Tin Plated.
- Item ⑥ Spring clamp : Stainless steel

Electrical: cULus TUV(EN/IEC60998-2-2)

- Voltage rating: 600 V 1000 V
- Current rating(Sol): 30 A 41 A
- Current rating(Str): 35 A 41 A
- Solid wire(AWG): 10-24 0.2mm²-10mm² (IEC)
- Stranded wire(AWG): 8-24 0.2mm²-6mm² (IEC)
- Wire strip length: 15-16 mm
- Withstanding Voltage: 1.6KV 3.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec

● Safety Approval: 

● Critical dimension: 

● Reference dimension: (X)

● The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

NK xx A 0 x C xxxx G

No. OF POLES: 02: 2 POLES, 04: 4 POLES, 16: 16 POLES

Body Color: 0 Black (RAL9005), 2 Red (RAL3001/D), 3 Orange(RAL2011/P), 4 Yellow(RAL1018/A), 5 Green(RAL6018/T), 6 Blue (RAL5015/A), 8 Grey(RAL7004/P), 9 White(RAL1102)

RoHS compliant (lead<4%)

In copper Alloy

0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by customer request. please contact sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NK 7.5mm Series Vertical (Single tail C type)(第1P為右缺腳子彈邊蓋) 雙數P			
PART NO.	NKxxA0xCxxxxG			DWG NO.	8NK0033
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Johnson 2022.11.29	Johnson 2022.11.29		Tolerance
					X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
SHEET: 01/01		REV.: B		UNIT: mm	SCALE: NONE