
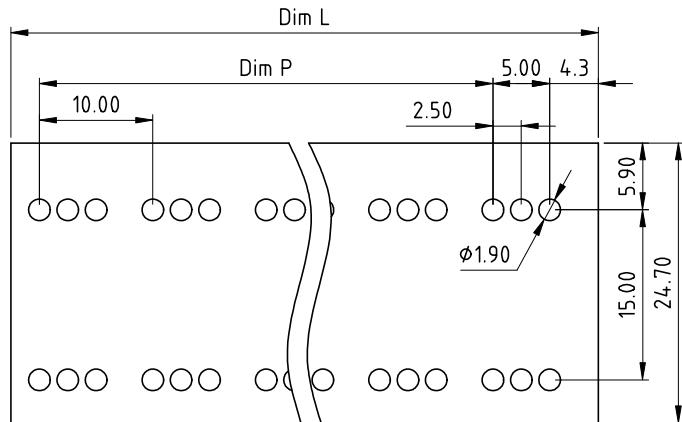
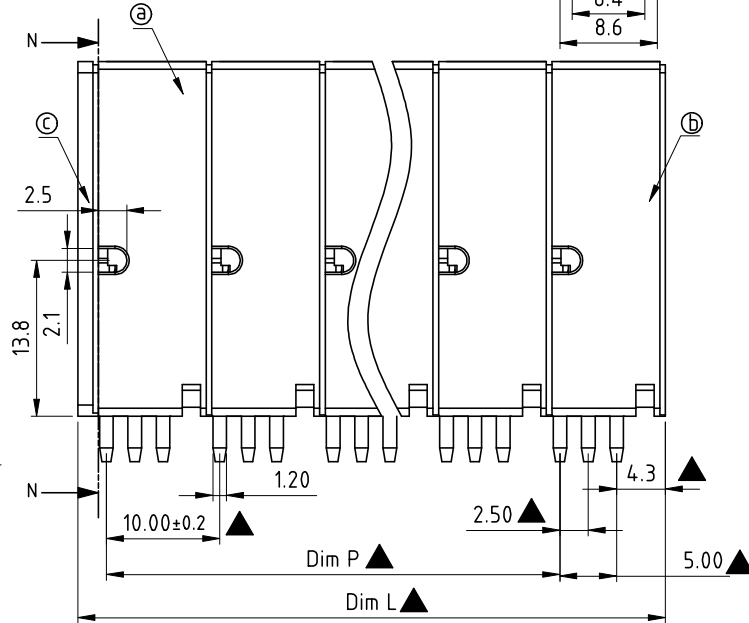



RoHS Compliance

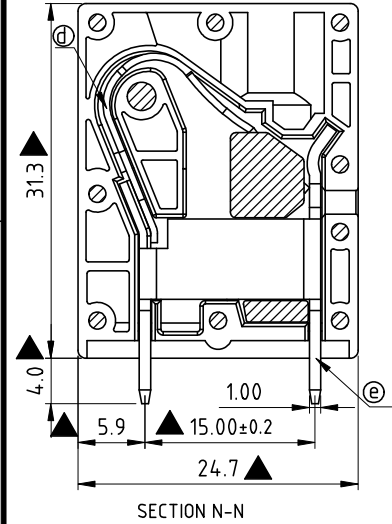

N=NUMBER OF POLES

DIM	Tolerance			
	1P	2P--5P	6P--9P	10P--12P
Dim P (N-1)×10.0		±0.40	±0.50	±0.60
Dim L N×10.0+1.8	±0.30	±0.40	±0.50	±0.60

P.C.B. LAYOUT
Top view

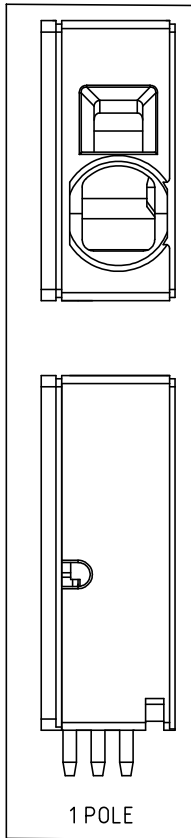

REV.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	12/05'13	The first release	Da cheng
C	△	11/21'22	Add Safety Approval TUV	Johnson
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ③ Terminal body: Thermoplastic (UL94V-0)
- Item ④ Terminal side body: Thermoplastic (UL94V-0)
- Item ⑤ Terminal cover: Thermoplastic (UL94V-0)
- Item ⑥ Spring clamp : Stainless steel
- Item ⑦ Solder pin : Copper, Tin Plated.

△ Electrical:	cULus	TUV(EN/IEC60998-2-2)
● Voltage rating:	300 V	250 V
● Current rating:	50 A	76 A
● Solid wire(AWG):	8-20	0.75mm ² -16mm ² (IEC)
● Stranded wire(AWG):	4-20	0.75mm ² -16mm ² (IEC)
● Wire strip length:	18-19mm	
● Withstanding Voltage:	1.6KV	2.0KV
● Operating temperature:	-40°C to +115°C	
● Wave Soldering temperature:	260°C ±5°C/5 Sec	
● Safety Approval:	UL	△
● Critical dimension:	▲	△

NP xx 1 0 x 0 xxxx G

No. OF POLES

- 01: 1 POLE
- 02: 2 POLES
- :
- 12: 12 POLES

Body Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7004/P)
- 9 White(RAL1102)
- C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NP 10.0mm Series Vertical (A type 平行脚)			
PART NO.	NPxx10x0xxxxG			DWG NO.	8NP0101
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Johnson 2023.01.06	Johnson 2023.01.06		Tolerance
					X. ±0.50
					X.X ±0.30
				UNIT: mm	X.XX ±0.10
				SCALE: NONE	X° ±1°
				SHEET: 01/01	REV.: C