





RoHS Compliant

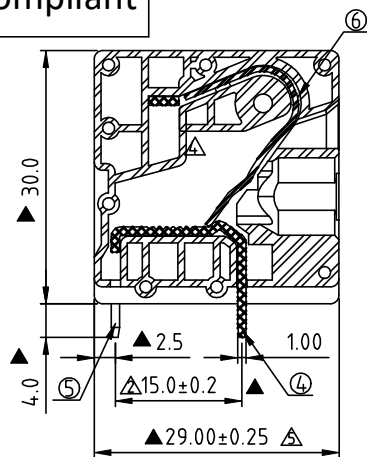

SECTION A-A

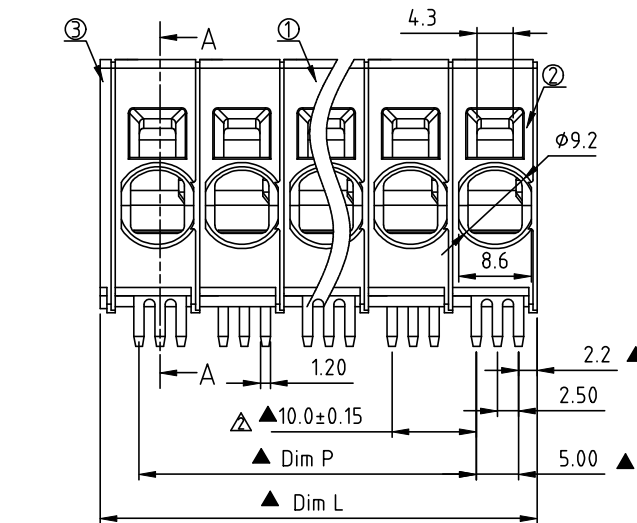

First pole

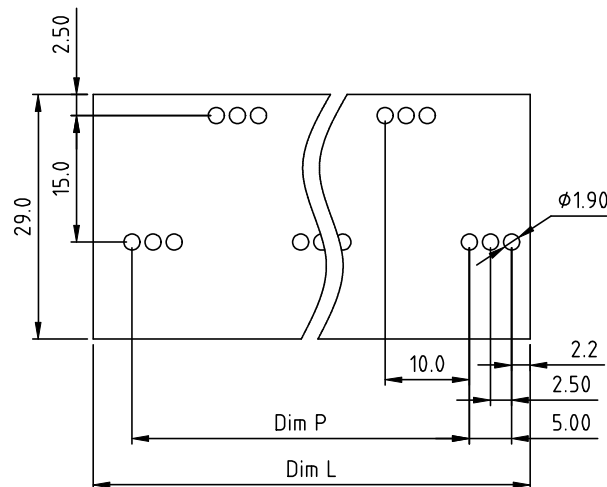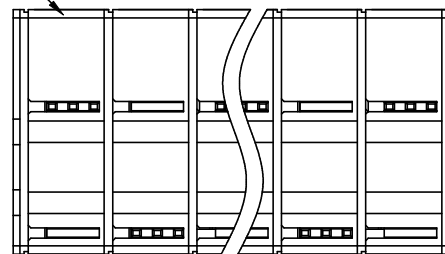

△N=NUMBER OF POLES

DIM		Tolerance		
		1P--5P	7P--9P	11P
Dim P	(N-1)×10.0	±0.40	±0.50	±0.60
Dim L	N×10.0+1.8	±0.40	±0.50	±0.60

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	△	11/12'12	change the product number	Da cheng
C	△	11/09'13	change the electrical specification /// update the drawing	Da cheng
D	△	12/28'13	update the drawing	Da cheng
E	△	2/27'23	Update the drawing	Petter
F	△	5/30'24	Update the drawing	Jesse

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal body: PA66 (UL94V-0)
 - Item ② Terminal side body: PA66 (UL94V-0)
 - Item ③ Terminal cover: PA66 (UL94V-0)
 - Item ④ Solder pin(front) : Copper, Tin Plated.
 - Item ⑤ Solder pin(back) : Copper, Tin Plated.
 - Item ⑥ Spring clamp : Stainless steel
- △ Electrical: cULus
- Voltage rating: 600 V
 - Current rating(SOL): 30 A
 - Current rating(STR): 40 A
 - Wire range:
 - Solid wire(AWG): 8-20
 - Stranded wire(AWG): 4-20
 - Wire strip length: 18-19mm
 - Withstanding Voltage: 2.2KV
 - Operating temperature: -40°C to +115°C
 - Wave soldering temperature: 260°C ±5°C/5 Sec
 - Safety Approval:
 - Critical dimension: ▲

△NP xx 1 1 x 1 xxxx G

△△ No. OF POLES
01: 1POLES
03: 3 POLES
:
11: 11 POLES

△ Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

(lead<4%)
In copper Alloy
0000: "@ " Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.


Amphenol
ANYTEK

CUSTOMER COPY


ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NP 10.0mm Series horizontal (B type 前腳線邊蓋) 單數P				
PART NO.		NPxx11x1xxxxG 		DWG NO.	8NP0003	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Jesse 2024.05.30	Jesse 2024.05.30		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV.: F	X.XX ±0.10
						X° ±1°


RoHS Compliant

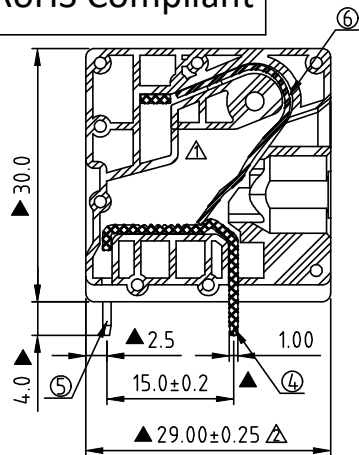

SECTION A-A

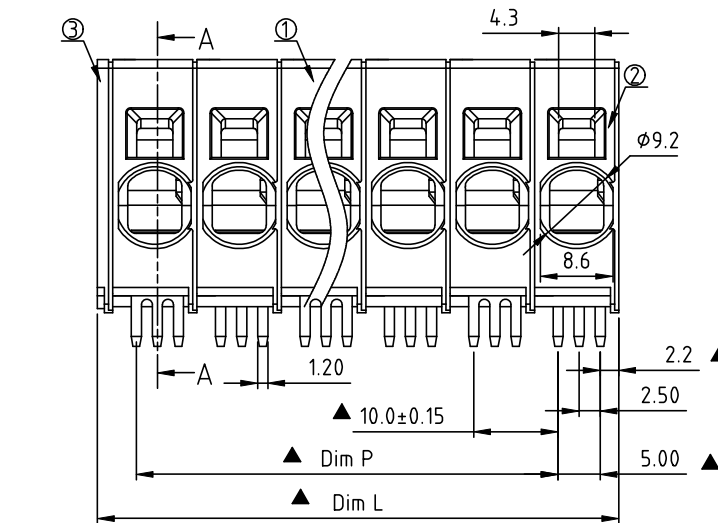

First pole

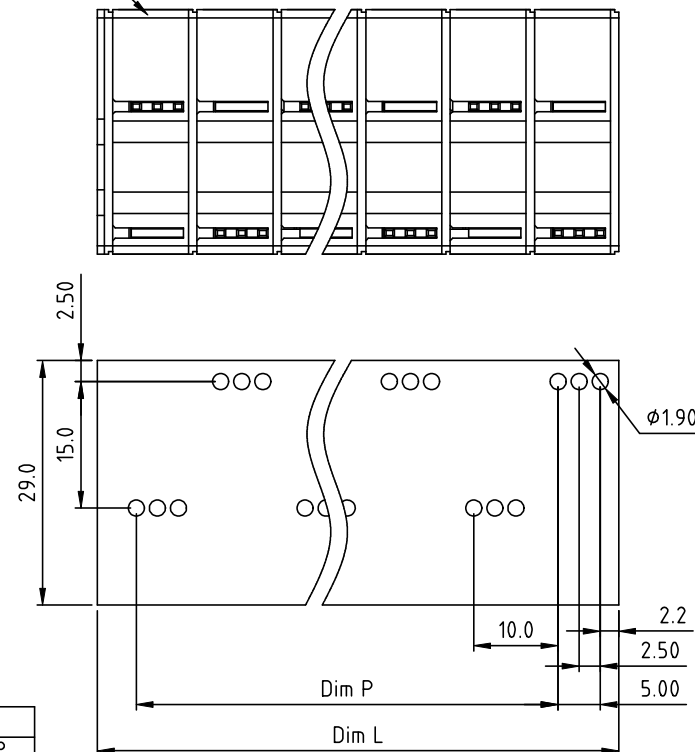

N=NUMBER OF POLES

DIM		Tolerance		
		2P--4P	6P--8P	10P-12P
Dim P	(N-1)×10.0	±0.40	±0.50	±0.60
Dim L	N×10.0+1.8	±0.40	±0.50	±0.60

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	12/28'13	The first release	Da cheng
C	△	2/27'23	Update the drawing	Petter
D	△	6/6'24	Update the drawing	Jesse

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal body: PA66 (UL94V-0)
- Item ② Terminal side body: PA66 (UL94V-0)
- Item ③ Terminal cover: PA66 (UL94V-0)
- Item ④ Solder pin(front) : Copper, Tin Plated.
- Item ⑤ Solder pin(back) : Copper, Tin Plated.
- Item ⑥ Spring clamp : Stainless steel

Electrical: cULus

- Voltage rating: 600 V
- Current rating(SOL): 30 A
- Current rating(STR): 40 A
- Wire range:
- Solid wire(AWG): 8-20
- Stranded wire(AWG): 4-20
- Wire strip length: 18-19mm
- Withstanding Voltage: 2.2KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C ±5°C/5 Sec
- Safety Approval: 
- Critical dimension: ▲

NP xx 1 1 x 1 xxxx G

No. OF POLES
02: 2 POLES
04: 4 POLES
12: 12 POLES

Body Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

(lead<4%)
In copper Alloy
0000: "@ " Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NP 10.0mm Series horizontal (B type 前脚垂直型) 雙數P				
PART NO.		NPxx11x1xxxxG		DWG NO.	8NP0006	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Jesse 2024.06.06	Jesse 2024.06.06		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	X.XX ±0.10
					REV: D	X° ±1°