





RoHS Compliant

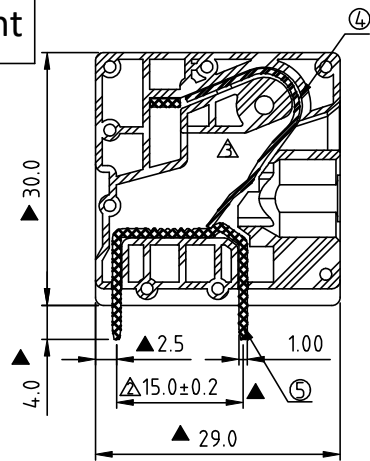

SECTION A-A

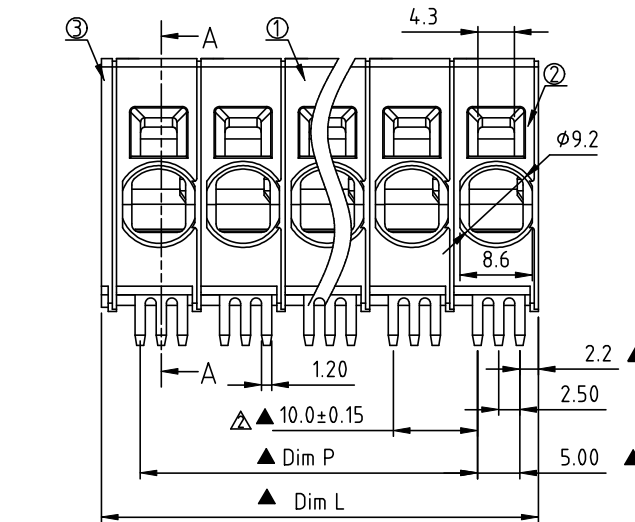

First pole

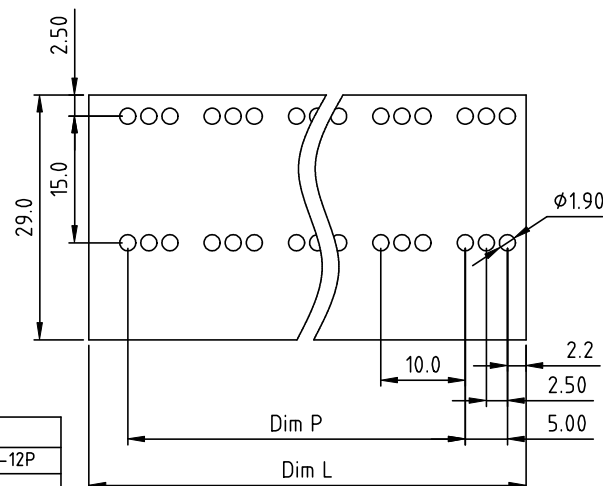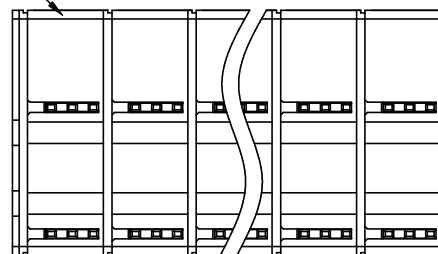

N=NUMBER OF POLES

DIM		Tolerance		
		1P--5P	6P--9P	10P--12P
Dim P	(N-1)×10.0	±0.40	±0.50	±0.60
Dim L	N×10.0+1.8	±0.40	±0.50	±0.60

PCB LAYOUT
TOP VIEW

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	△	11/12'12	change the product number	Da cheng
C	△	11/09'13	change the electrical specification /// update the drawing	Da cheng
D	△	2/27'23	Update the drawing	Petter

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Terminal body: Thermoplastic (UL94V-0)
- Item ② Terminal side body: Thermoplastic (UL94V-0)
- Item ③ Terminal cover: Thermoplastic (UL94V-0)
- Item ④ Spring clamp : Stainless steel
- Item ⑤ Solder pin : Copper, Tin Plated.

- △ Electrical: cULus
- Voltage rating: 300 V
 - Current rating(SOL): 30 A
 - Current rating(STR): 40 A
 - Wire range:
 - Solid wire(AWG): 8-20
 - Stranded wire(AWG): 4-20
 - Wire strip length: 18-19mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Wave soldering temperature: 260°C ±5°C/5 Sec
 - Safety Approval:
 - Critical dimension: ▲

NP xx 1 1 x 0 xxxx G

- △ No. OF POLES
- 01: 1POLES
 - 02: 2 POLES
 - :
 - 12: 12 POLES

△ Body Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7004/P)
- 9 White(RAL1102)
- C Multiple colors

RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NP 10.0mm Series horizontal (A type 平行脚)			
PART NO.	NPxx11x0xxxxG			DWG NO.	8NP0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Petter 2023.02.27	Petter 2023.02.27		Tolerance
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: D	X° ±1°