


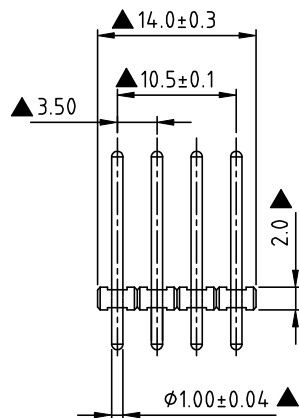


RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		12/11-18	Initial release	zhangcan

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



P.C.B. LAYOUT

Material:

- Item (a) Terminal(housing): PA66 30%GF (UL94V-0)
- Item (b) Contact pin: Brass, Bright Tin plated over Nickel plated

Electrical: cULus

- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +130°C
- Wave Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ▲

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	OP-3.5mm series 直径 1.0mm L=17.5mm 上14.0 下3.5 圆头						
PART NO.	OP04220100M0G			DWG NO.	80P0132		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		zhangcan 12/11-18	zhangcan 12/11-18				
					UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
SHEET: 01/01				REV.: B		X.XX	±0.10
						X°	±1°