


RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		06/13-18	Initial release	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

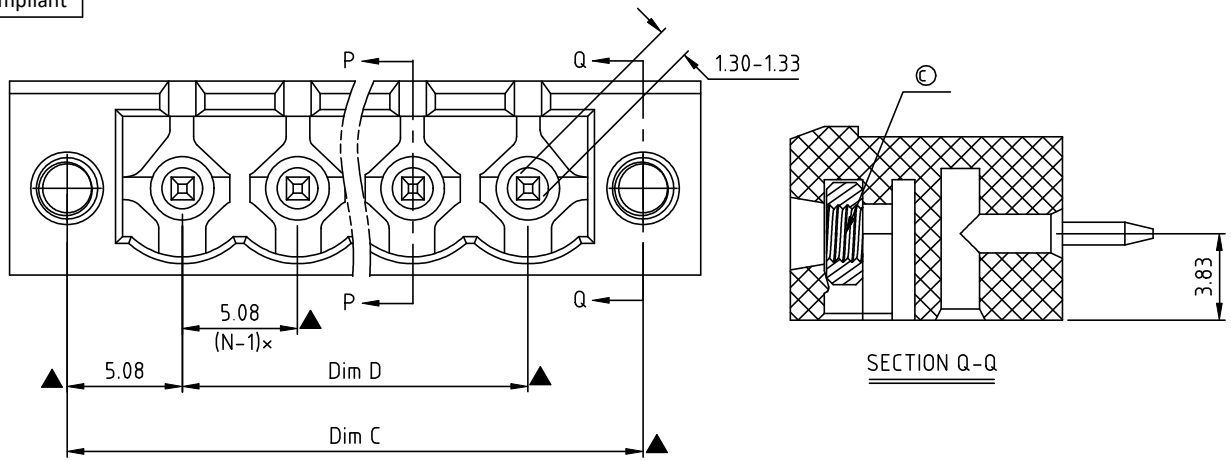


SECTION Q-Q

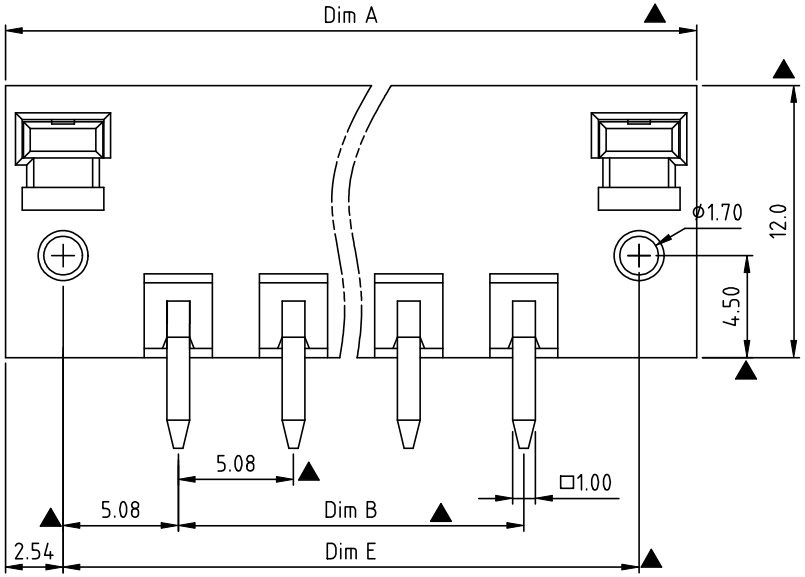

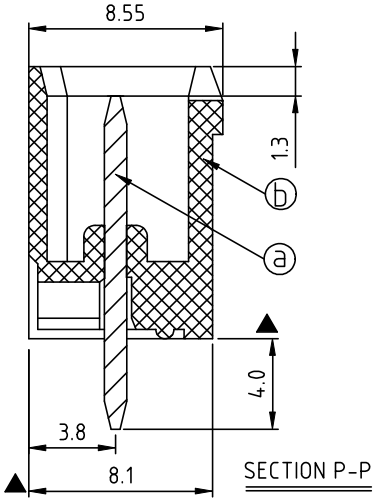

SECTION P-P

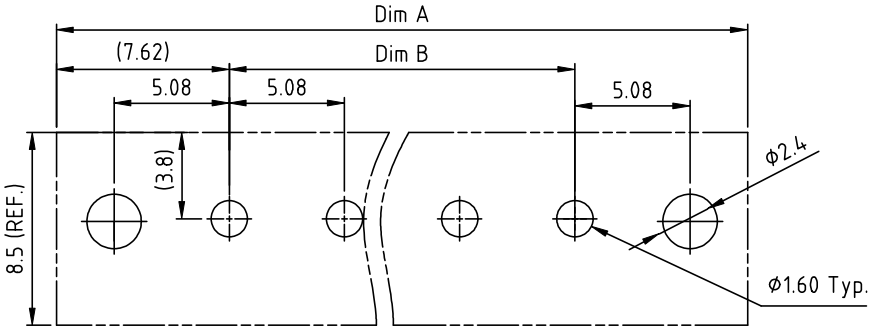

RECOMMENDED PCB LAYOUT

N= NUMBER OF POLES

Dim A	(N+2)×5.08
Dim B	(N-1)×5.08
Dim C	(N+1)×5.08
Dim D	(N-1)×5.08
Dim E	(N+1)×5.08

Poles	Tol
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.30
19P-24P	±0.40

Material:

- Item ⓐ Male contact pin: Copper Bright Tin plated over Nickel plated
- Item ⓑ Terminal(housing): Thermoplastic (UL94V-0)
- Item ⓒ Flange nut: Steel zinc plating (M2.5)

Electrical:

- Voltage rating: 300V
- Current rating: 20A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: c UL us
- Critical dimension: ▲

OQ xx 5 6 x 0 xxxx G

- xx — No. OF POLES: 02: 2 POLES … 24: 24 POLES
- x — COLOR: 0 Black (RAL9005); 2 Red (RAL3001/D); 3 Orange(RAL2011/P); 4 Yellow(RAL1018/A); 5 Green(RAL6018/T); 6 Blue (RAL5015/A); 8 Grey(RAL7035/D); 9 White(RAL1102); C Green(RAL6018/U)
- xxxx — 0000: "@" Logo (Standard); 000A: "ANYTEK" Mark; Any special item by customer requst. please contact sales department.
- G — RoHS compliant (lead<4%) In copper Alloy

Amphenol ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	OQ 5.08mm 180° /WF Series 2p-24p (侧面装耳扣)				
PART NO.	OQxx56x0xxxxG/AG			DWG NO.	80Q07447
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 06/13-18	Chen Bo 06/04-18	UNIT: mm / SCALE: NONE / SHEET: 01/01 / REV.: B	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°