

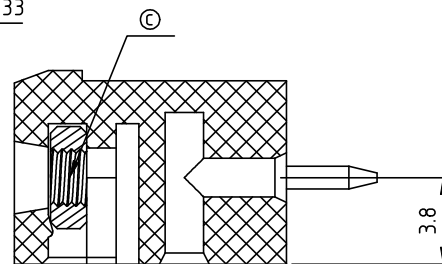
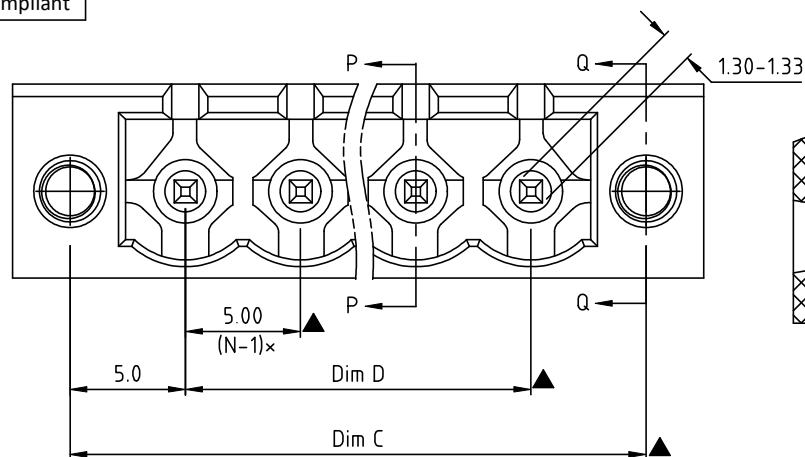



RoHS Compliant

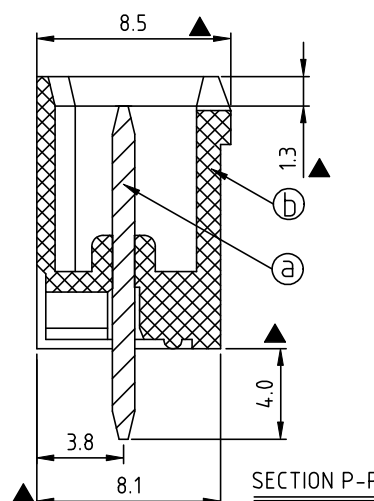

SECTION Q-Q

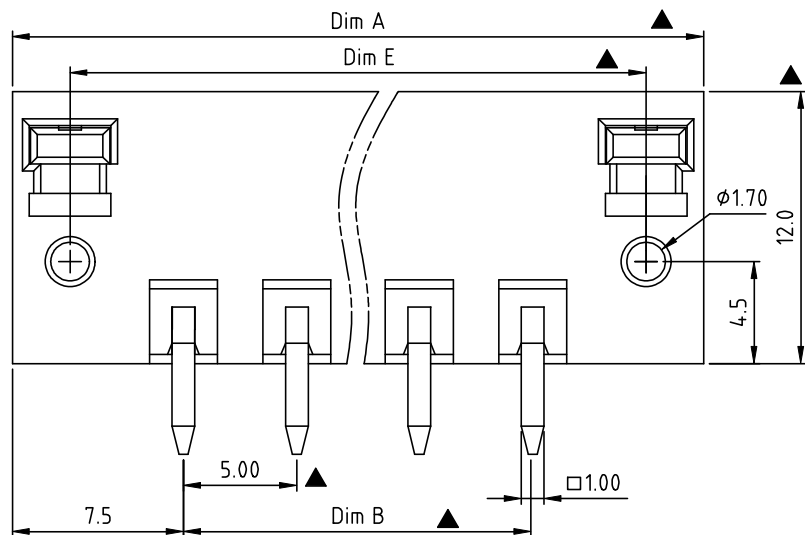

SECTION P-P

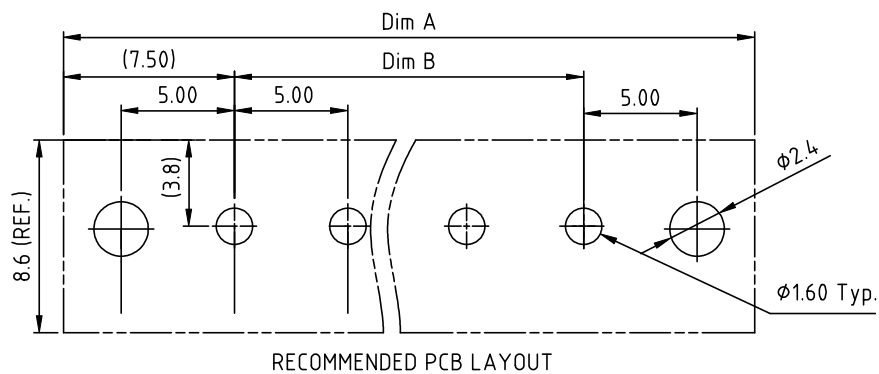

RECOMMENDED PCB LAYOUT

N= NUMBER OF POLES

Dim A	(N+2)×5.00
Dim B	(N-1)×5.00
Dim C	(N+1)×5.00
Dim D	(N-1)×5.00
Dim E	(N+1)×5.00

Poles	Dim A/B/C/D/E Tol
2P-6P	±0.15
7P-12P	±0.20
13P-18P	±0.30
19P-24P	±0.40

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		01/08-19	Initial release	zhangcan

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Contact pin: Copper , Bright Tin plated over Nickel plated
- Item ② Insulator(housing): Thermoplastic (UL94V-0)
- Item ③ With flange nut: Steel M2.5, Zinc plated

Electrical:

cULus

- Voltage rating: 300V
- Current rating: 20A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ▲

OQ xx 7 6 x 0 xxxx G

No. OF POLES
02: 2 POLES
24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.**Amphenol
ANYTEK****CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 5.00mm 180° /WF Series 2p-24p (侧面装耳扣)				
PART NO.	OQxx76x0xxxxG/AG			DWG NO.	80Q05196	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		zhangcan 01/08-19	zhangcan 01/08-19		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
						X.XX ±0.10
						X° ±1°
				SHEET: 01/01	REV.: B	