
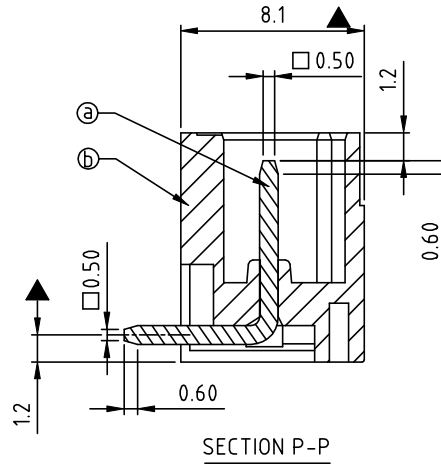
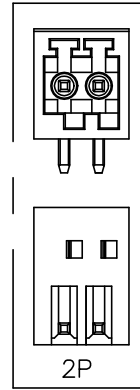
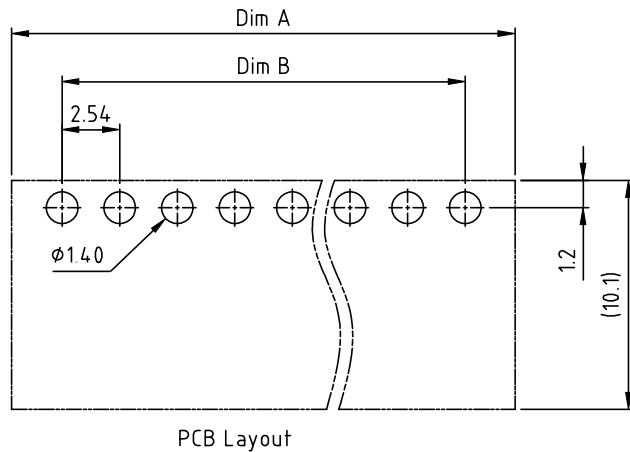
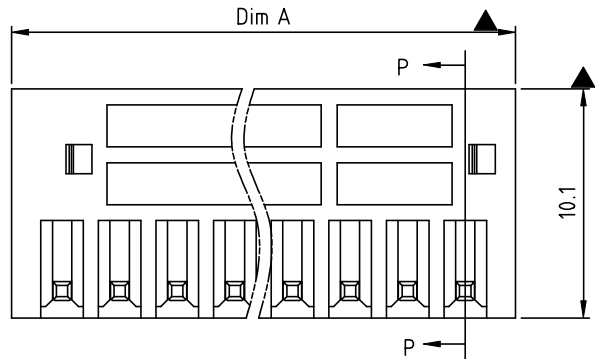


RoHS Compliant

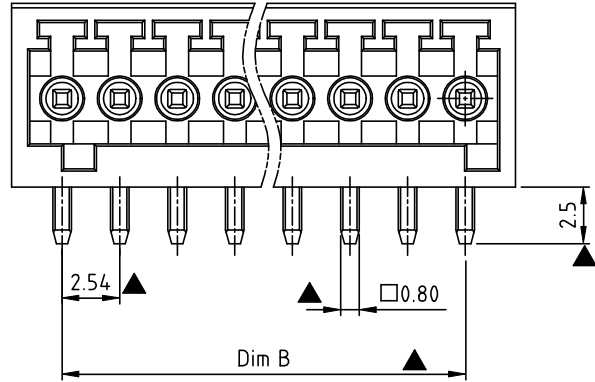

Dimension

Dim A	$N \times 2.54 + 1.9$
Dim B	$(N-1) \times 2.54$

N=Number of poles

Poles	Tolerance
2p-6p	± 0.10
7p-12p	± 0.15
13p-18p	± 0.20
19p-24p	± 0.30

SIGN	SIGN	DATE	DESCRIPTION	APPROVER
B	—	03/02`26	Initial Release	PansLee
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ③ Male contact pin: Brass Tin plated
- Item ④ Terminal(housing): PA66 (UL94V-0)

Electrical: UL 1059 Group B Group F (UL Only)

- Voltage rating: 150V 100V
- Current rating: 7A 7A
- Withstanding Voltage: 13KV
- Operating temperature: -40°C to +120°C
- Wave soldering temperature: 260°C $\pm$ 5°C/5 Sec
- Safety Approval: 
- Critical dimension: 

OQ xx C 3 x 3 xxxx G

No. OF POLES
02: 2 POLES
:
24: 24 POLES

Color


- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green (RAL6018/U)

G RoHS compliant
0000: "@" Logo (Standard)
Any special item by customer request, please contact sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 2.54mm 90° B-Type Series 2P-24P								
PART NO.		OQxxC3x3xxxxG			DWG NO.	80Q11014				
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
			PansLee 03/02`26	PansLee 09/08`25			UNIT: mm		X. ±0.50	
							SCALE: NONE		X.X ±0.30	
					SHEET: 01/01		REV.: B		X° ±1°	