
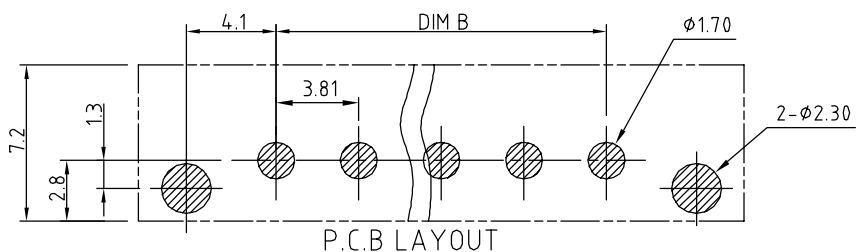
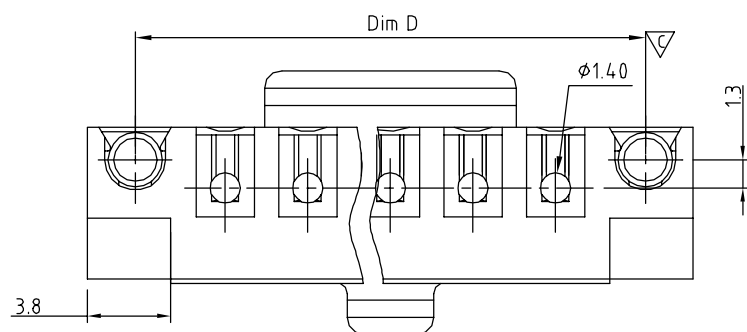
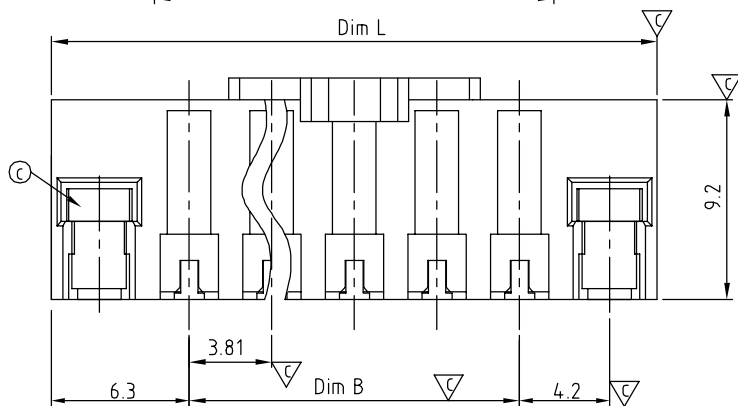


Note: 3P Cover for odd poles
2p Cover for even poles

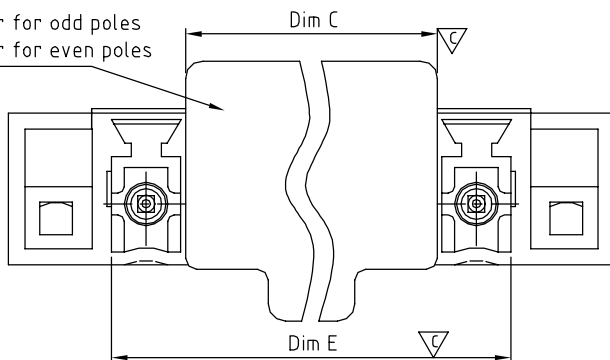


Cover

	Dim C
2P	7.81
3P	11.62

N=Number of poles

Dim L	$(N-1) \times 3.81 + 12.7$
Dim B	$(N-1) \times 3.81$
Dim D	$(N-1) \times 3.81 + 8.3$
Dim E	$(N-1) \times 3.81 + 3.2$

Poles	Dim L	Dim B	Dim D	Dim E
2p-6p	± 0.15	± 0.15	± 0.15	$\begin{matrix} +0.15 \\ -0.0 \end{matrix}$
7p-12p	± 0.20	± 0.20	± 0.20	$\begin{matrix} +0.20 \\ -0.0 \end{matrix}$
13p-16p	± 0.30	± 0.30	± 0.30	$\begin{matrix} +0.25 \\ -0.0 \end{matrix}$

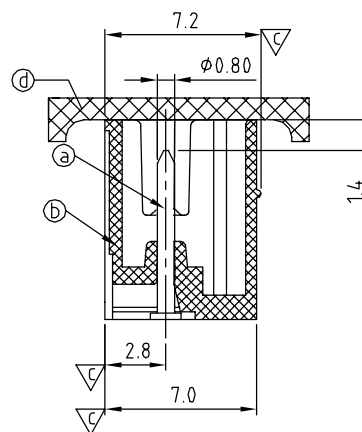

Material:

- Item ③ Male contact pin: Brass, Tin plated
- Item ⑤ Terminal housing: PA9T (UL94V-0)
- Item ⑥ With flange stud: Brass, Tin plated
- Item ④ With cover: PA9T (UL94V-0)

Electrical: cULus

- Voltage rating: 150V
- Current rating: 8A
- Withstanding Voltage: 1.3 KV
- Operating temperature: -45°C to +130°C
- Soldering temperature: 280°C/10 Sec
- Safety Approval:
- Critical dimension: ∇

OQ xx 3 5 x 0 Dxxx G

No. OF POLES
02: 2 POLES
:
:
16: 16 POLES

Color
0 Black (RAL9005)

G: Pb<40000ppm

D000: "@" Logo (Standard)
D00A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 3.81mm Series SMT (With cover & Tape reel)			
PART NO.	OQxx35x0DxxxG			DWG NO.	80Q0D01
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
			Chen Bo 2011.06.02		Tolerance
					X. ±0.50
					X.X ±0.30
				UNIT: mm	X.XX ±0.10
				SCALE: NONE	X° ±1°
				SHEET: 01/01	REV.: B