

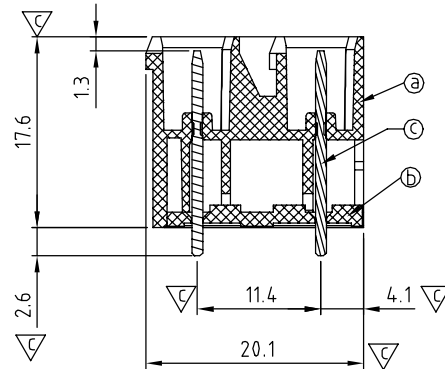
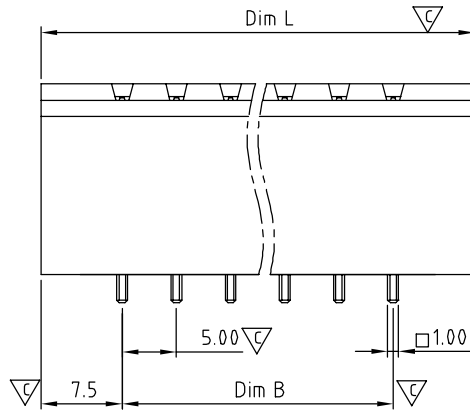
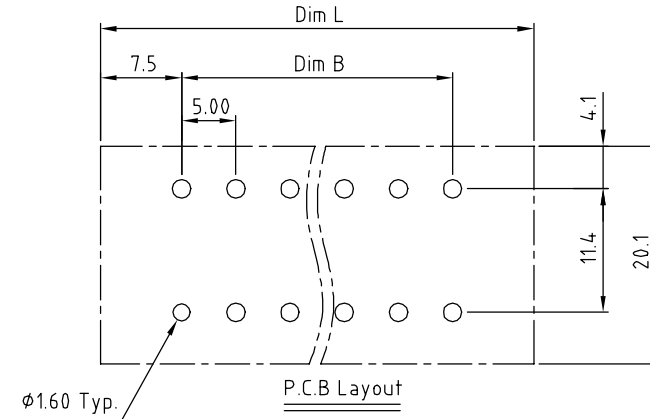


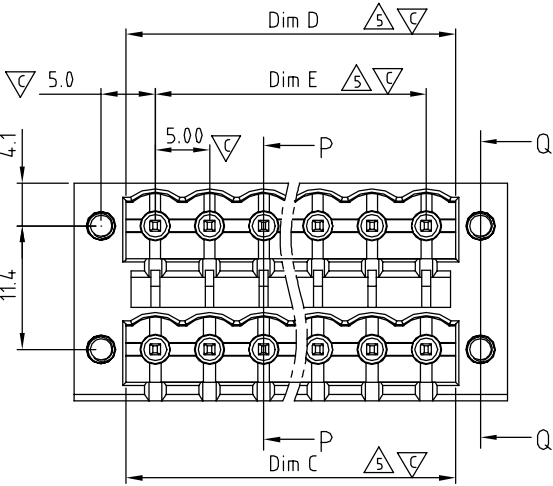

SECTION P-P

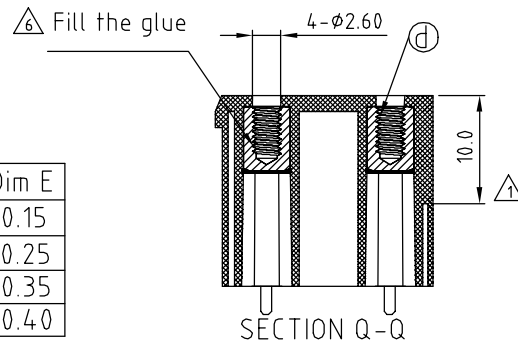

SECTION Q-Q

N = Number of poles
 Dim L=(N+2)×5.0
 Dim B=(N-1)×5.0
 Dim C=(N-1)×5.0+5.4
 Dim D=(N-1)×5.0+5.4
 Dim E=(N-1)×5.0

Poles	Dim L	Dim B	Dim C	Dim D	Dim E
2×2-2×6p	±0.15	±0.15	+0.05 -0.05	+0.05 -0.05	±0.15
2×7-2×12p	±0.25	±0.25	+0.10 -0.05	+0.10 -0.05	±0.25
2×13-2×18p	±0.35	±0.35	+0.20 -0.05	+0.20 -0.05	±0.35
2×19-2×24p	±0.40	±0.40	+0.25 -0.10	+0.25 -0.10	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	210.05.29	The design is changed	Chen Bo
△	04/16`12	Operating temperature is changed from -40°C to +130°C to -45°C to +120°C	Chen Bo
△	04/16`12	The Material is changed	Chen Bo
△	04/16`12	Add is cULus	Chen Bo
△	04/16`12	The Dimension C & D & E are added	Chen Bo
△	04/16`12	Flange nut is changed	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item a Terminal(housing): High temp. polyamide (UL94V-0)
- Item b Terminal(cover): High temp. polyamide (UL94V-0)
- Item c Male contact pin of short: Copper Tin plated
- Item d With flange nut: Brass M2.5

Electrical: cULus

- Voltage rating: 300V
- Current rating: 12A
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +120°C
- Soldering temperature: 280°C/10 Sec
- Safety Approval: cULus
- Critical dimension: △

KE xx 7 2 x 0 xxxx G

No. OF POLES
 04: 2×2 POLES
 06: 2×3 POLES
 :
 48: 2×24 POLES

COLOR
 0: BLACK

RoHS compliant
 (lead<4%)
 In copper Alloy

0000: "@" Logo (Standard)
 000A: "ANYTEK" Mark
 Any special item by
 customer request.
 please contact sales

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KE 5.0mm With Flange Series 2×2P-2×24P (180°-Vertical) THR type						
PART NO.	KExx72x0xxxxG			DWG NO.	8KE0112		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Chen Bo 04/16`12	Chen Bo 04/16`12		X. ±0.50		
					X.X ±0.30		
					X.XX ±0.10		
					X° ±1°		