


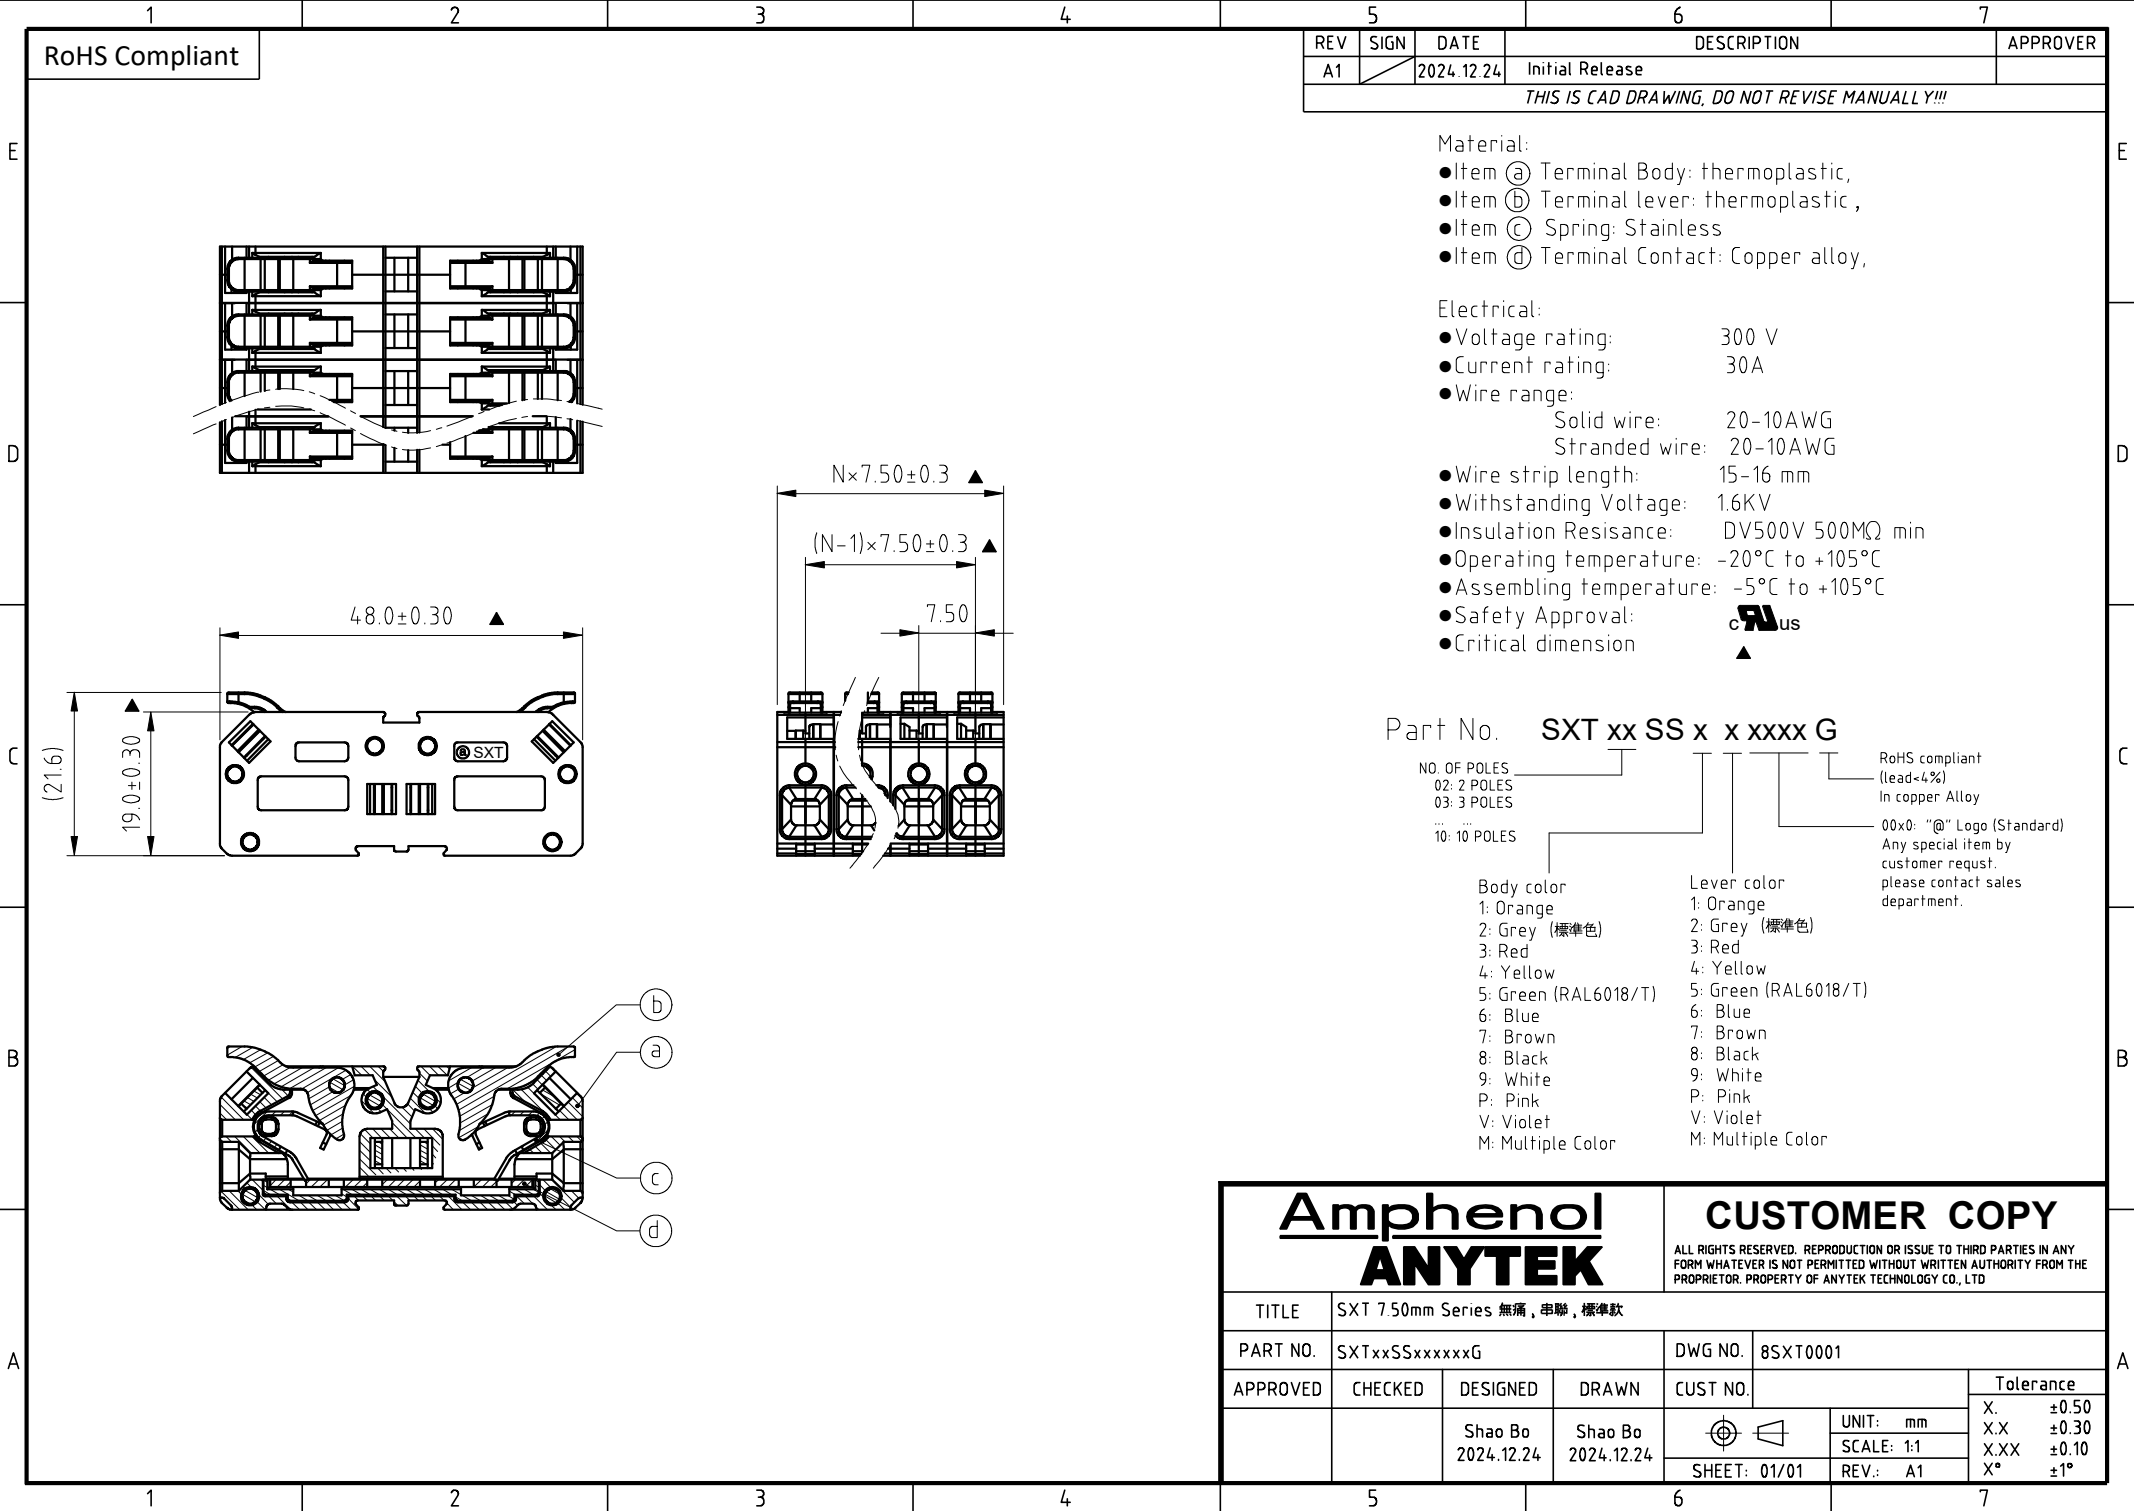

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A1		2024.12.24	Initial Release	
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

- Material:
- Item ① Terminal Body: thermoplastic,
 - Item ② Terminal lever: thermoplastic ,
 - Item ③ Spring: Stainless
 - Item ④ Terminal Contact: Copper alloy,

- Electrical:
- Voltage rating: 300 V
 - Current rating: 30A
 - Wire range:
 - Solid wire: 20-10AWG
 - Stranded wire: 20-10AWG
 - Wire strip length: 15-16 mm
 - Withstanding Voltage: 1.6KV
 - Insulation Resistance: DV500V 500MΩ min
 - Operating temperature: -20°C to +105°C
 - Assembling temperature: -5°C to +105°C
 - Safety Approval: 
 - Critical dimension 

Part No. SXT xx SS x x xxxx G

NO. OF POLES	RoHS compliant
02: 2 POLES	(lead<4%)
03: 3 POLES	In copper Alloy
...	00x0: "@" Logo (Standard)
10: 10 POLES	Any special item by customer request. please contact sales department.
Body color	Lever color
1: Orange	1: Orange
2: Grey (標準色)	2: Grey (標準色)
3: Red	3: Red
4: Yellow	4: Yellow
5: Green (RAL6018/T)	5: Green (RAL6018/T)
6: Blue	6: Blue
7: Brown	7: Brown
8: Black	8: Black
9: White	9: White
P: Pink	P: Pink
V: Violet	V: Violet
M: Multiple Color	M: Multiple Color

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	SXT 7.50mm Series 無痛, 串聯, 標準款						
PART NO.	SXTxxSSxxxxxxG			DWG NO.	8SXT0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Shao Bo 2024.12.24	Shao Bo 2024.12.24			UNIT: mm	X. ±0.50
						SCALE: 1:1	X.X ±0.30
				SHEET: 01/01		REV.: A1	X.XX ±0.10
							X° ±1°