
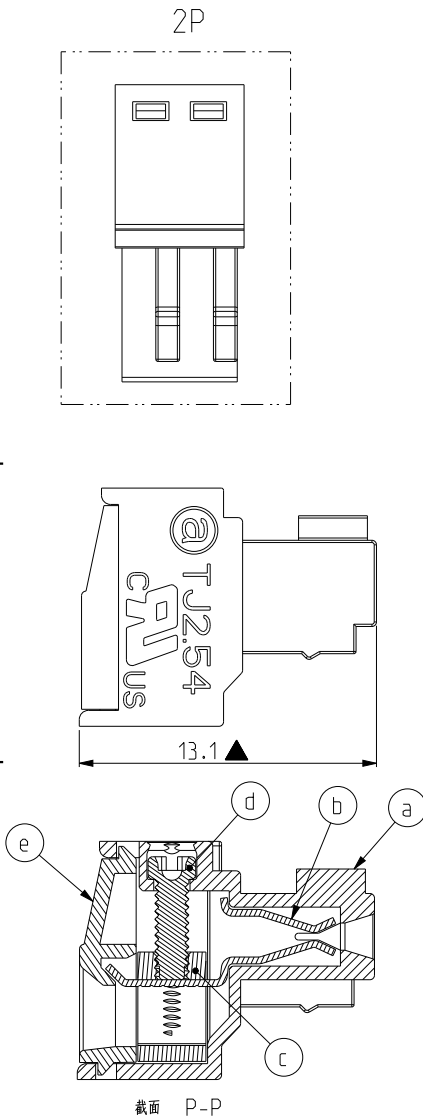


ROHS Compliant

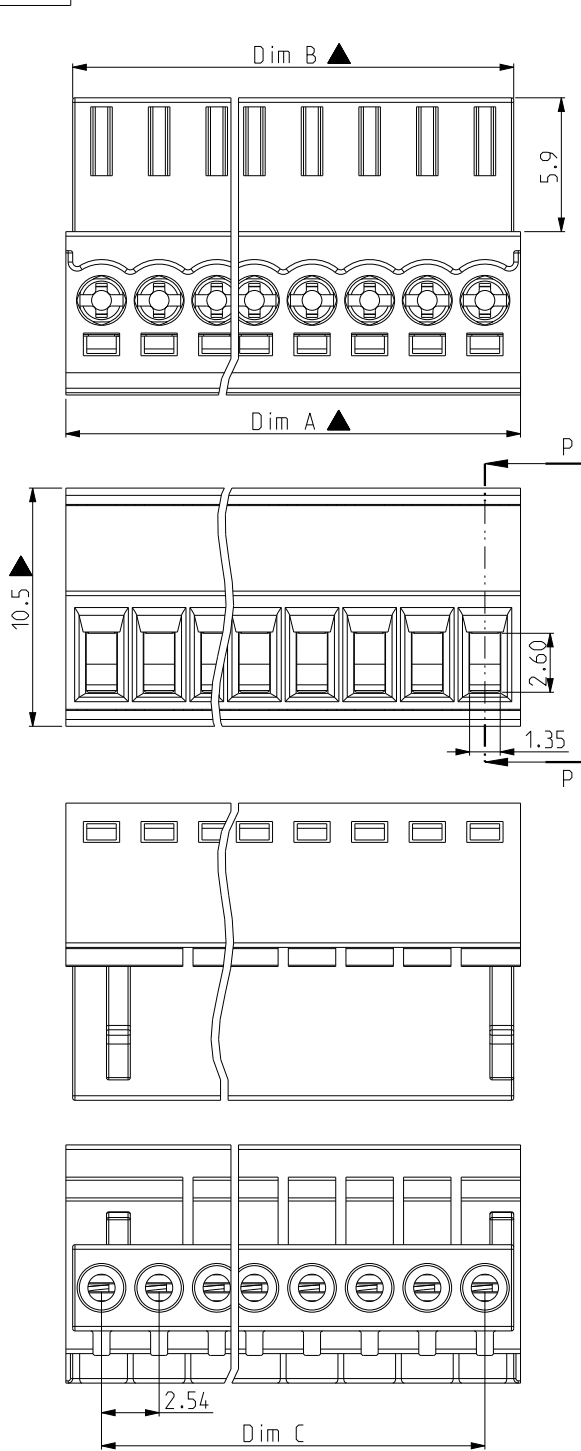

N = Number of poles
Dim A=Nx2.54+0.6
Dim B=Nx2.54
Dim C=(N-1)*2.54

Poles	Dim A/B/C
2p-6p	±0.15
7p-12p	±0.20
13p-18p	±0.25
19p-24p	±0.30

REV	SIGN	DATE	DESCRIPTION	APPROVER
A0	-	20250915	The first release	Jesse
A1	△	20260303	Update the drawing	Jesse
THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!				

Notes:

- UL1059 Group B Group F(UL Only)
- △ Voltage rating: 150V 125V
- △ Current rating: 7A 7A
- △ Solid wire(AWG): 18-30
- Stranded wire(AWG):18-30
- Torque: 0.1N.m
- Screw: M1.6
- △ Wire strip length: 5-6mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40℃ to +115℃
- Safety Approval: **CAI** us
- Critical dimension: ▲

TJ xx C 0 x 3 xxxx G

No. of poles Color G ROHS compliant (lead<4%) In copper Alloy

02:...2poles 0 Black

03:... 3poles 2 Red

upto 24poles 3 Orange

4 Yellow

5 Green

(RAL 6018/T)

6 Blue

8 Grey

9 White

C Green (RAL 6018/U)

0000 Standard @ Logo

Any special item by customer request, please contact sales department.

①	Cover	PA66,Green,UL94-V0	1
②	Screw M1.6	"+/-" slot type Steel, Zinc Plated	N
③	Clamp	Brass(CuZn) Ni Plated	N
④	Contact	PhBz , Ni Plated	N
⑤	Body	PA66,Green,UL94-V0	1
ITEMS	PART NAME	Description	QTY

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE:		TJ-2.54mm Series (2p-24p)					
PART NO.		TJxxC0x3xxxxG		DWG NO.		8TJ01001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		Jesse	Jesse			X. ±0.5	
		2026.03.03	20250821			X.X ±0.3	
				SHEET: 1 / 1		X.XX ±0.1	
				REV.: A1		X° ±1°	