

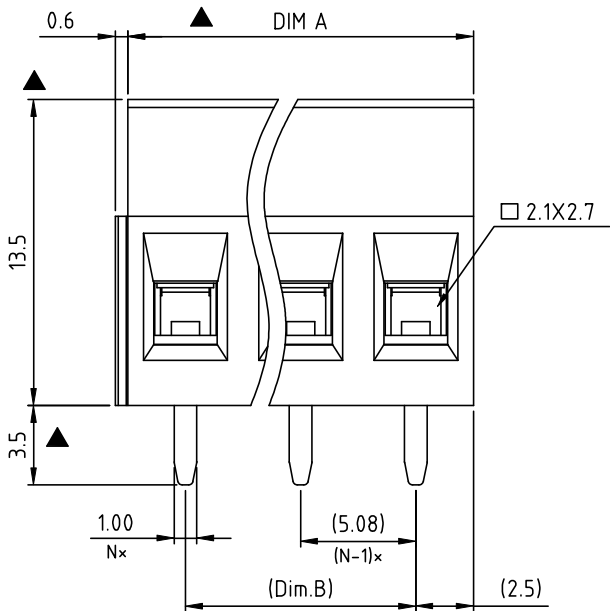
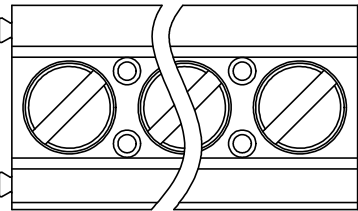


RoHS Compliant

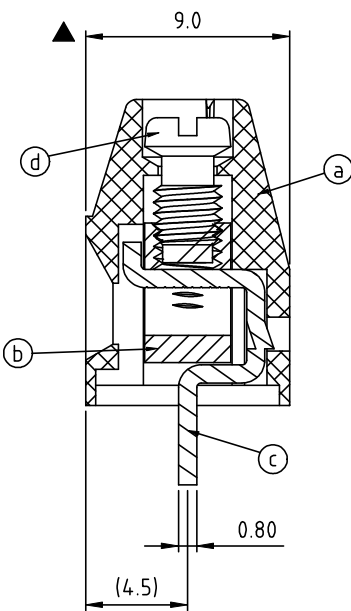

N=Number of poles

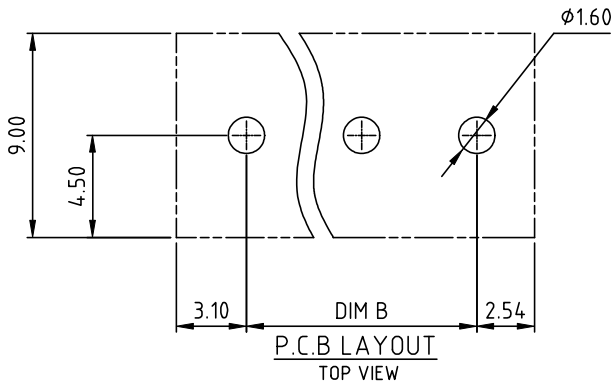

Dimension

DIM A	Nx5.08
DIM B	(N-1)x5.08

N=Number of poles

POLES	TOL
2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.35
17p-24p	±0.40

Material:

- Item① Terminal housing : NL66 (UL 94V-0)
- Item② Clamp : Brass ,Ni plated
- Item③ Wire guard solder pin : Brass ,Bright Tin plated
- Item④ Terminal screw : Steel Zinc plating"-slot type

Electrical cULus TUV

- Voltage rating: 300VAC 250VAC
- Current rating: 16A 17.5A
- Wire range: 0.2-1.5mm²
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Torque: 3.5Lb-In. 0.5Nm
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV 2.0KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec

Safety Approval: cULus TUV

Reference dimension: (x)The dimensions of pitch are just for reference, take the actual assembly result as a judgment when inserting the terminal block into the PCB hole.

VI xx 21 x 2 xxxx G

- 02 2 POLES
- 03 3 POLES
-
- 24 24 POLES
- Color
 - 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7035/D)
 - C Green(RAL6018/U)
- 0000:"@Logo (Standard)
- 000A:"ANYTEK"Logo
- Any special item by customer request, please contact sales department.
- G RoHS compliant (lead<4%) In copper Alloy

Amphenol
ANYTEK

CUSTOMER COPY
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE VI 5.08 SERIES 180° wire inlet (without cover)				
PART NO. VIxx21x2xxxxG		DWG NO. 8VI0103		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Guoxue 2026.04.15	Guoxue 2026.04.15	
				Tolerance
				UNIT: mm
				SCALE: NONE
SHEET: 01/01				REV.: I

X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°