
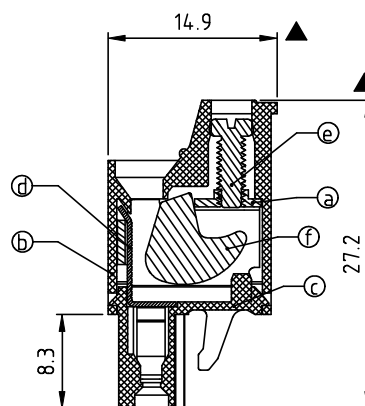

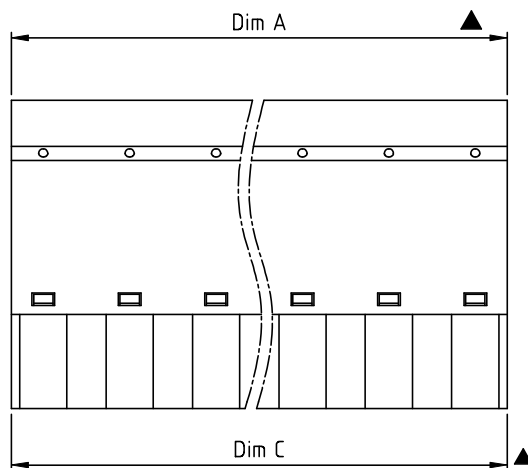


RoHS Compliant

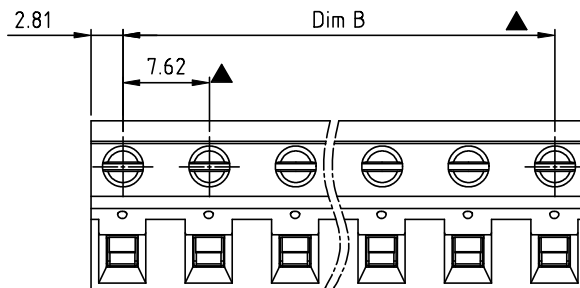

N = Number of poles
Dim A=(N-1)x7.62+5.62
Dim B=(N-1)x7.62
Dim C=(N-1)x7.62+5.62

POLES	Dim A	Dim B	Dim C
2-4p	±0.15	±0.15	±0.15
5-8p	±0.20	±0.20	±0.20
9-12p	±0.30	±0.30	±0.30
13-16p	±0.40	±0.40	±0.40

REV	DATE	ECN NO.	APPROVER
F	04/19-21	ECN202104010	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Clamp: Steel Zinc plated
 - Item ② Terminal(Up body): Thermoplastic (UL94V-0)
 - Item ③ Terminal(Down body): Thermoplastic (UL94V-0)
 - Item ④ Female contact: PhBz ,Bright Tin plated over Nickel plated
 - Item ⑤ Terminal screw: Steel Zinc plating "--" slot type
 - Item ⑥ Clampage:Steel/steel Zinc plated
- Electrical: cULus
- Voltage rating: 300V
 - Current rating: 12A
 - Wire range:
 - Solid wire(AWG): 12-22
 - Stranded wire(AWG): 12-22
 - Torque: 3.5 Lb-In.
 - Screw: M2.5
 - Wire strip length: 8-9mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Safety Approval: cULus
 - Critical dimension: ▲

VM xx 05 x 1 xxxx G

POLES

02: 02 pole
... ..
16: 16 pole

Color

0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo

000A: "ANYTEK" Logo

Any special item by
customer request.
please contact sales
department.

**Amphenol
ANYTEK****CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VM 7.62 mm W/O Flange Series				
PART NO.	VMxx05x1xxxxG			DWG NO.	8VM0502	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Chen Bo 04/20-21	Chen Bo 04/20-21			
					SCALE: NONE	X.X ±0.30
				SHEET: 01/01	REV: F	X.XX ±0.10
						X° ±1°