
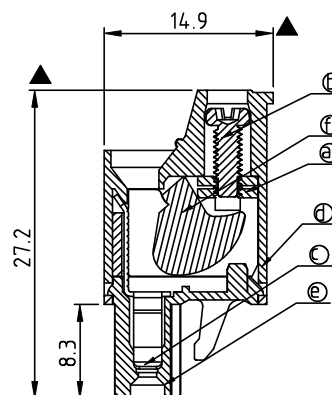



RoHS Compliant

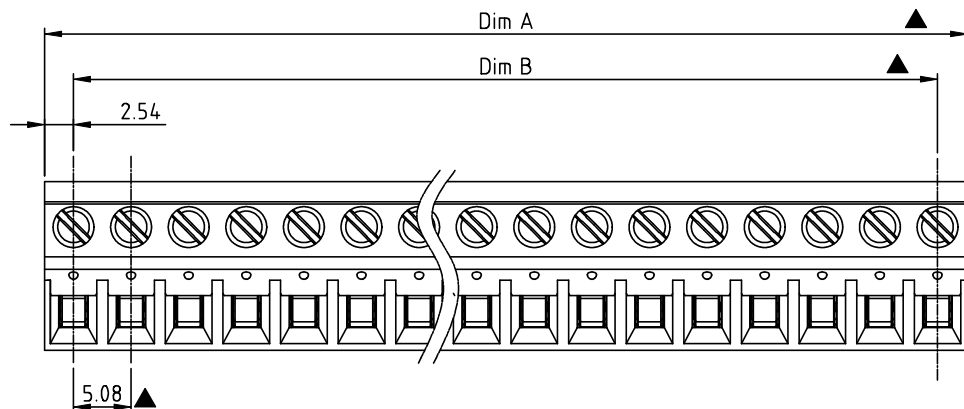

N = Number of poles

Dim A=Nx5.08

Dim B=(N-1)x5.08

Dim C=Nx5.08

Poles	Dim A	Dim B	Dim C
2-6p	±0.20	±0.20	±0.20
7-12p	±0.25	±0.25	±0.25
13-18p	±0.30	±0.30	±0.30
19-24p	±0.40	±0.40	±0.40

REV	DATE	ECN NO.	APPROVER
E	04/19-21	ECN202104010	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item① Clamp: Steel zinc plated.
- Item② Terminal screw: Steel Zinc plating “-” slot type
- Item③ Female contact: PhBz Bright Tin plated over Nickel plated
- Item④ Terminal (Up body): Thermoplastic (UL94V-0)
- Item⑤ Terminal (Down body): Thermoplastic (UL94V-0)
- Item⑥ Clampage: Steel Zinc plated

- Electrical cULus / VDE
- Voltage rating: 300VAC / 300VAC
- Current rating: 12A / 20A
- Wire range: 0.34-2.5mm²
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5Lb-In / 0.4N.m
- Screw: M2.5
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV / 2.5KV
- Operating temperature: -40°C to +115°C
- Safety approval: cULus VDE
- Critical dimension: ▲

● Part No.: VM xx 5 5 x 1 xxxx G

No. OF POLES
02: 2 POLES
:
24: 24 POLES

COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange (RAL2011/P)
4 Yellow (RAL1018/A)
5 Green (RAL6018/T)
6 Blue (RAL5015/A)
8 Grey (RAL7035/D)
9 White (RAL1102)
C Green (RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy
0000: Standard
000A: “ANYTEK” Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VM 5.08mm Low Profile Type W/O Flange Series							
PART NO.	VMxx55x1xxxxG			DWG NO.	8VM0302			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Chen Bo 04/19-21	PansLee 2019.06.20			UNIT: mm	X. ±0.50	
						SCALE: NONE	X.X ±0.30	
						REV: E	X.XX ±0.10	
						SHEET: 01/01	X° ±1°	