
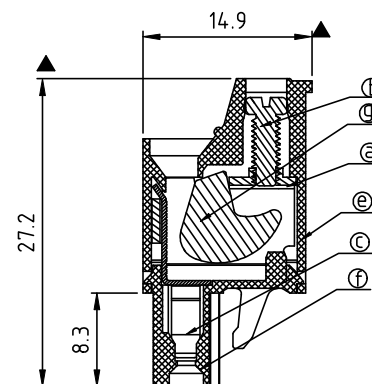
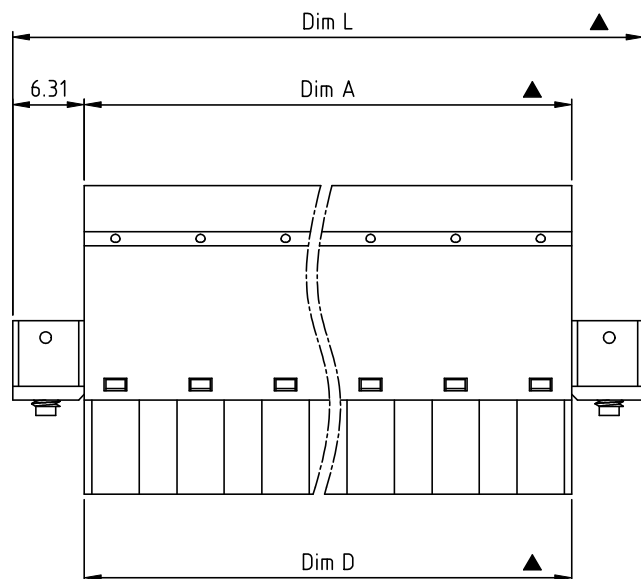



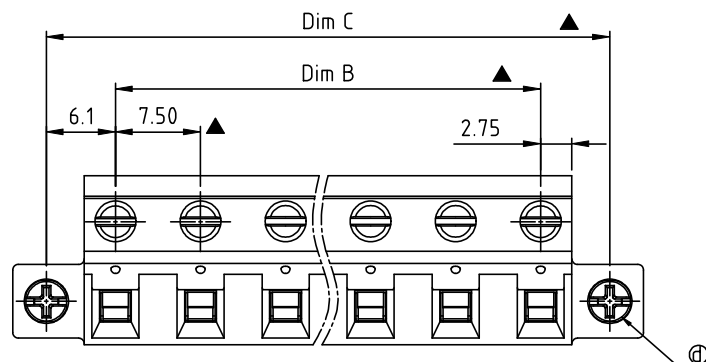

Material

- Item a Clamp: Steel zinc plated.
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz, Bright Tin plated over Nickel plated
- Item d With flange screw: Steel zinc plated M2.5 "+/-" slot type
- Item e Terminal (Up body): Thermoplastic (UL94V-0)
- Item f Terminal (Down body): Thermoplastic (UL94V-0)
- Item g Clampage: Steel Zinc plated
- Electrical cULus
- Voltage rating: 300VAC
- Current rating: 12A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5Lb-In
- Screw: M2.5
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Safety approval: cULus
- Critical dimension: ▲

VM xx A 5 x 3 xxxx G

POLES

02: 02 pole

"" ""

16: 16 pole

Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)

In copper Alloy

0000: Standard
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

N=Number of poles

Dim.A	(N-1) × 7.50+5.5	POLES	Dim A/B/C/D/L TOL
Dim.B	(N-1) × 7.50	2P - 4P	-0.10/+0.10
Dim.C	(N-1) × 7.50+12.2	5P - 8P	-0.20/+0.20
Dim.D	(N-1) × 7.50+5.5	9P - 12P	-0.30/+0.30
Dim.L	(N-1) × 7.50+18.12	13P - 16P	-0.40/+0.40

**Amphenol
ANYTEK****CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VM 7.5 mm W/ Flange Series				
PART NO.	VMxxA5x3xxxxG			DWG NO.	8VM0401	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Chen Bo 04/19-21	Chen Bo 03/19-21			
				UNIT: mm	X.	±0.50
				SCALE: NONE	X.X	±0.30
				SHEET: 01/01	X.XX	±0.10
				REV: F	X°	±1°