


ROHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
B	–	20240702	The first release	Jesse

THIS IS CREO DRAWING, DO NOT REVISE MANUALLY!!!

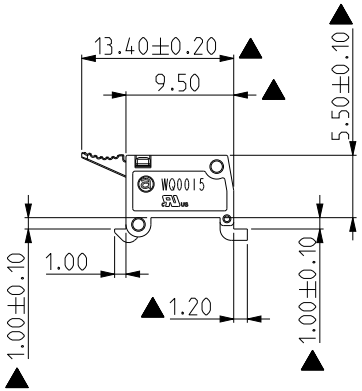

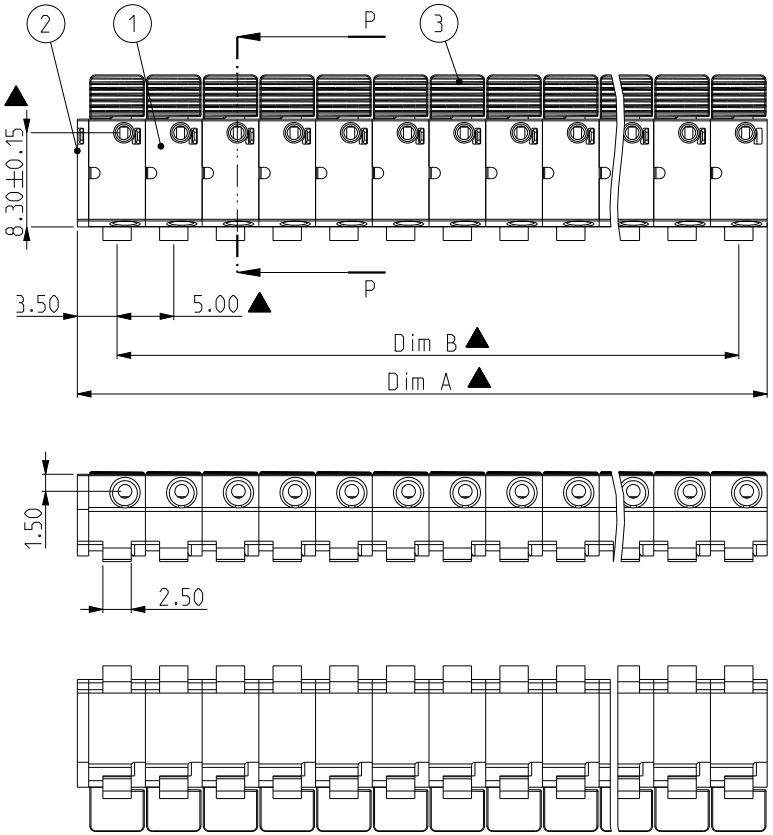



Section P-P

Notes:
Voltage rating: 300V
Current rating: 7A
Wire range (AWG): 18-24 (Solid)
Wire strip length: 6.5mm
Withstanding Voltage: 1.6KV AC Min
Insulation resistance : 1000 MΩ or more at DC 500V
Operating temperature: -40°C to +115°C
Critical dimension: ▲
SAFETY APPROVAL: cULus

WQ0015 XX X 000G

No.of poles
01:..1pole
02:..2poles

upto 12poles

G ROHS compliant
(lead<4% in copper alloy)

Color(Body/Lever,the same color)
0 Black
1 Natural color
2 Red
3 Orange
4 Yellow
5 Green(RAL6018/T)
6 Blue
8 Grey(RAL7004/P)
9 White
c Multiple colors

ITEMS	PART NAME	Description	QTY
5	Terminal	PhBz,Tin plated	N
4	Spring clamp	Stainless steel	N
3	Lever	PA6 (UL 94V-HB)	N
2	Cover	PA66 (UL 94V-0)	1
1	Body	PA66 (UL 94V-0)	N

N=Number of poles

DIM		TOL			
		1P	2P-3P	4P-6P	7P-12P
Dim A	N*5.0+1.0	±0.10	±0.15	±0.20	±0.30
Dim B	(N-1)*5.0	/	±0.15	±0.20	±0.30

Amphenol ANYTEK

CUSTOMER COPY
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE:	WQ-15 5.0 Series				
PART NO.	WQ0015XXX000G			DWG NO.	8WQ0012-15
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Jesse 2024-07-02	Jesse 2024-07-02	UNIT: mm SCALE: 1.500 SHEET: 1 /1 REV.: B	X. ±0.5 X.X ±0.3 X.XX ±0.1 X° ±1°