
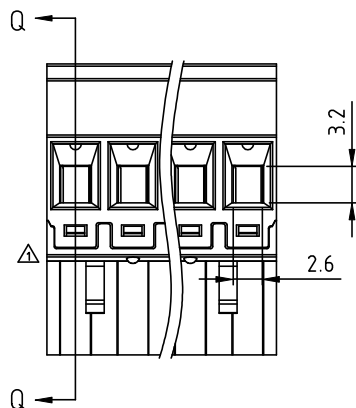
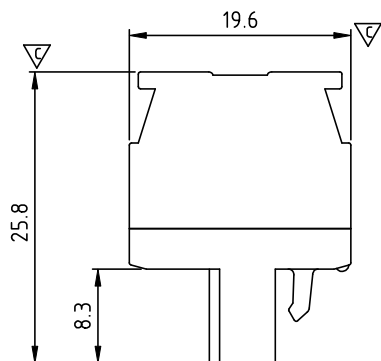
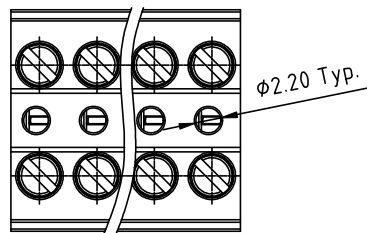



SECTION Q-Q

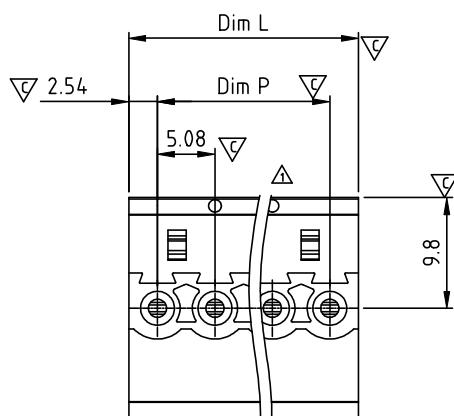

N=NUMBER OF POLES

Dim L	N×5.08
Dim P	(N-1)×5.08

	TOL			
	2P-6P	7P-12P	13P-18P	19P-24P
Dim L	±0.15	±0.25	±0.35	±0.40
Dim P	±0.15	±0.25	±0.35	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	10/16/14	Change the position of protruding point & update the drawing	Evan
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item ② Terminal up housing: Thermoplastic (UL94V-0)
- Item ③ Terminal down housing: Thermoplastic (UL94V-0)
- Item ④ Terminal screw: Steel,Zinc plating "-" slot type
- Item ⑤ Clamp: Brass, Ni plated
- Item ⑥ Wire guard: PhBz ,Tin plated

Electrical

- Voltage rating: 300V
- Current rating: 12A
- Solid wire (AWG): 12-24
- Stranded wire (AWG): 12-24
- Torque (Lb-In): 4.3
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Critical dimension: ∇

cULus

K5 xx 51 x 0 xxxx G

- △ No. OF POLES
- 02 2 poles
- 03 3 poles
-
- 24 24 poles

Color

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- C Green(RAL 6018/U)

- G RoHS compliant (lead<4%)
- In copper Alloy
- 0000: "@" Logo (Standard)
- 000A: "ANYTEK" Mark
- Any special item by customer request.
- please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K5 - 5.08 Series 2P-24P "-" screw (Without flange)						
PART NO.	K5xx51x0xxxxG			DWG NO.	8K50001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Evan 2014.10.16	Evan 2014.10.16		UNIT: mm		Tolerance
					SCALE: NONE		X. ±0.50
				SHEET: 01/01	REV.: C		X.X ±0.30
							X.XX ±0.10
							X° ±1°