

SIGN	DATE	DESCRIPTION	APPROVER
⚠			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

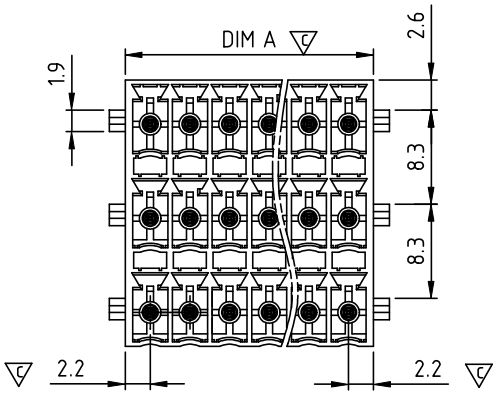

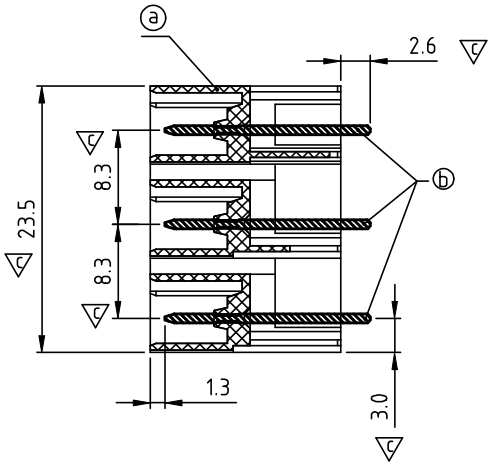



Material:

- Item ⓐ Terminal(housing): PA66 30% GF (UL94V-0)
- Item ⓑ Contact pin : copper Tin plated

Electrical: cULus

- Voltage rating: 160V
- Current rating: 5.5A
- Withstanding Voltage: 1.32 KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C ±10°C/5 Sec
- APPROVAL:
- Critical dimension: ▽c

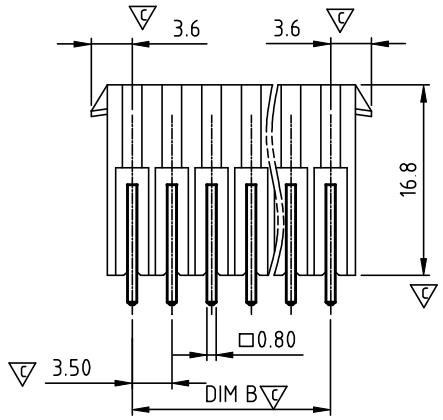

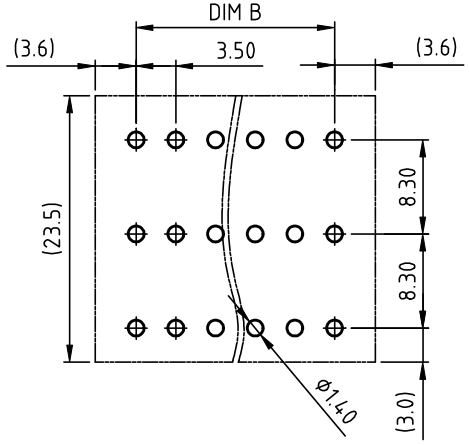

PCB Layout

K3 xx 1 3 x 0 xxxx G

- No. OF POLES
 - 06: 3×2 POLES
 - 09: 3×3 POLES
 - :
 - :
 - 72: 3×24 POLES
- COLOR
 - 0 Black (RAL9005)
 - 3 Orange(RAL2011/P)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7035/D)
- RoHS compliant (lead<4%) In copper Alloy
- A000: "@" Logo (Standard)
 A00A: "ANYTEK" Mark
 Any special item by customer requst. please contact sales department.

N=NUMBER OF CONTACTS

DIM		TOL		
		3×2P--3×5P	3×6P--3×16P	3×17P--3×24P
Dim A	(N/3-1)×3.5+4.4	±0.20	±0.25	±0.30
Dim B	(N/3-1)×3.5			

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K3 3.5mm With latch Series (180°-Vertical) DIP type				
PART NO.	K3xx13x0xxxxG			DWG NO.	8K30012
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Runner 2010.09.18	Runner 2010.06.28	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: B	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°